
JAXA Earth Tools : ASIST (Automated Satellite Image Stacking Tool)

User Manual

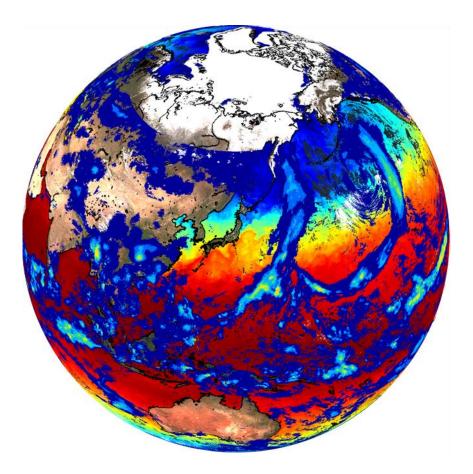

April, 2022

JAXA Space Technology Directorate I

Earth Observation Research Center (EORC)

Revision history

date	location	revision	
2021/7/21	-	-	
2022/4/5	-	Corrected the relevant part to support MATLAB 2022a.	
		Removed Linux (Ubuntu) support.	

Contents

1.	Pur	rpose of this document3							
2.	Too	ool Specification	4						
2	2.1.	Main Functionality	4						
2	2.2.	Processing flow	5						
2	2.3.	Required PC specification and Network	6						
2	2.4.	Available Product	6						
	2.4	4.1. Available satellite name and sensor list	6						
	2.4	4.2. Product classification	8						
	2.4	4.3. Specific settings for ALOS-2 product	8						
2	2.5.	Specification of output tool	10						
3.	Pro	rocedure of tool usage	11						
3	8.1.	Obtain the accounts for satellite data usage (required)	11						
3	8.2.	Install of MATLAB runtime file (required)	11						
3	3.3.	Install of Decompression software (arbitrarily: windows only)	11						
3	8.4.	Migration of the tool and the related files (required)	12						
3	8.5.	Modification of SetAccount.txt (required)	12						
3	8.6.	Modification of SetParameter.txt (required)	12						
3	8.7.	Modification of SetProduct.csv (required)	18						
3	8.8.	Modification of SetType.csv (arbitrarily)	19						
3	8.9.	Location of TIF and KML files (arbitrarily)	20						
3	8.10.). Execution of the tool and output file	21						
	3.1	10.1. Execution of the tool and output file	21						
	3.1	10.2. Example of output file	23						
	3.1	10.3. About log file	23						
4.	Cau	aution and supplementary note for tool usage	24						
4	.1.	Adjustment of set up file	24						
4	.2.	Tool usage	24						
5.	Abo	bout tool specification and quality	25						

6.	C	Contact	26
7.	R	References	27
7	7.1.	. Terra, Aqua MODIS	27
7	7.2.	2. GCOM-C SGLI	27
7	7.3.	B. GCOM-W AMSR-2	27
7	7.4.	AW3D, ALOS-2 PSR MOS/FNF	27
7	7.5.	5. ALOS-2	28
7	7.6.	5. GSMaP	28
7	7.7.	7. JASMES	28
7	7.8.	3. Others	28

1. Purpose of this document

Earth observation satellite data is generally in special formats (HDF: Hierarchical Data Format, netCDF, CEOS format, binary, etc.) and projection grids (sinusoidal projection, satellite scene, etc.) and its specification is different depend on each distribution site and satellite sensor. Researching and understanding all of these data processing and visualization from the beginning and developing processing scripts are burdensome task.

Therefore, this tool has been developed for researchers in other fields and programmers who are not familiar with satellite data processing to support research and consider the utilization of satellite data. By using this tool, you can easily process, visualize, and use satellite data regardless of the sensor type, even when using a large number of images.

In particular, the tool automatically identifies, downloads, and pre-processes source data to generate image products on PC by just specifying the interested date, time, latitude, longitude, and product then executing the tool in the user configuration file.

The generated images are in formats that are easy to display and use, such as KML/PNG files (which can be displayed and superimposed on google earth, etc.), npz files (which can be used with numpy in python), geotiff, etc.

This document describes the tool specification and instruction etc. By using this tool, we hope that researchers in other fields and programmers will be able to reduce the effort required to examine the use value of satellite data and find new use values.


2. Tool Specification

2.1. Main Functionality

Following table shows the main tool functionality list. Please note that some functions are not supported, or unique processing functions are needed depend on the types of satellite products. (Example: ALOS-2 product cannot download automatically with interference processing function (unique function))

ID	Category	Functionality				
1	Automatic product	(1) Setting lat, lon by KML (arbitrarily)				
	identification &	(2) Dividing lat, lon area to saving memory				
	Download	(3) Specify resolution (arbitrarily)				
		(4) Search custom day, area product list				
		(5) FTP connection, saving products				
		(6) Availability of FTP connection /offline processing				
2	Pre-Processing	(1) Product reading /change of physical quantity				
		(2) Extract/integrate/mozaiking/data, and apply QA flag				
		(3) Dfferential interferometric SAR processing (only ALOS-2)				
		(4) EQuiRectangular (EQR) Projection or Mercator				
		projection for image				
3	Post-Processing	(1) User specified image/color range, map/file output				
		(geotiff, PNG&KML, CSV, binary, Geojson, npz)				
		(2) RGB composition \cdot output				
		(3) Image composite (8 days, 16 days, one month) function				
		(4) Output function of time-series animation (GIF)				
		(5) Space statistics data output by KML, Administrative data				
		(6) Output function of coastline/sea depth (-200m) image				
		(7) Processing log, meta files output				

2.2. Processing flow

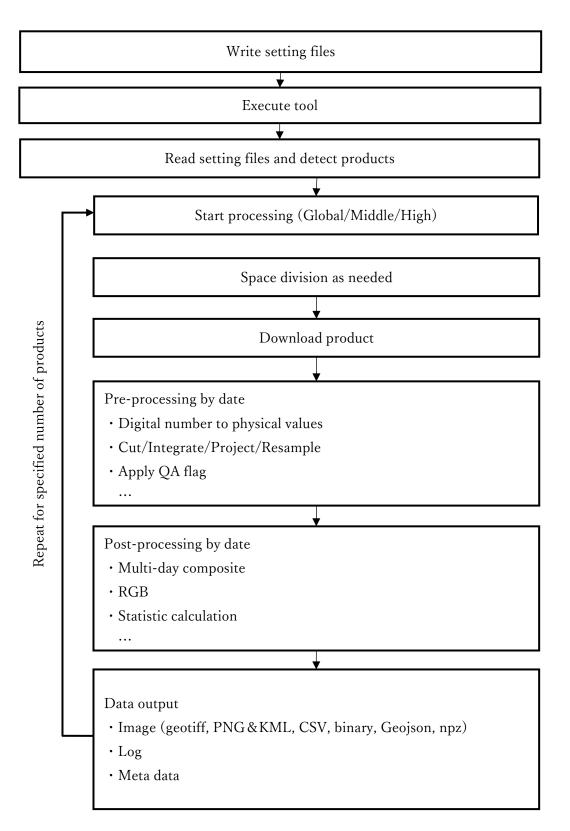

2.3. Required PC specification and Network

Following spec PC is operable. It takes a long analysis time depending on the specified date range, latitude and longitude range. Therefore, we recommend changing the power settings not to sleep on operating systems if necessary.

Also, it's better to start from small range($\gg 1$), because there is a possibility to stop the tool due to the lack of memory depending on the specified latitude and longitude range.

		* *
ID	Item	Value
1	Operating system	Windows 10 (64bit)
2	Recommended	Equiv. Intel or AMD x86-64 processor
	CPU speed	(recommended over 4 core)
3	Recommended	More than 4GB × 1 (recommended over 8GB)
	Memory	
4	Drive	More than 5-8 GB as a free space (for tool install only)
		More than 100 GB as a free space (recommended condition
		for data usage) ※ 2
5	Network	More than 10 Mbps 💥3

Table. Required PC specification and Network

%1 Rough indication for medium resolution, latitude and longitude range; ± 1.5 deg, about three type designations

%2 High-capacity HDD (external one, etc.) is recommended in order to download data and save the output image

X3 Stable network environment is necessary for data download.

2.4. Available Product

2.4.1. Available satellite name and sensor list

Following table shows the available satellites name and product list. Please refer to SetProduct.csv for the types of products that can be obtained for each sensor. Please note that this tool does not cover all the products distributed for the relevant sensor. Also, if you want to know the details of the source product or if you apply the flag using SetType.csv, please refer to each website described in Chapter 7. 7.

ID	0 11: /0					
ID	Satellite/Sensor	Start of observation,	Data	Note		
	Product	End of observation	Interval			
1	Terra	Feb. 2000 \sim	1 day	Data Interval depends on		
	MODIS	Under observation		product type		
2	Aqua	July 2002 \sim	1 day	Data Interval depends on		
	MODIS	Under observation		product type		
3	GCOM-C	Jan. 2018 ~	1 day	Data Interval depends on		
	SGLI	Under observation		product type		
4	GCOM-W	July 2012 \sim	1 day	Data Interval depends on		
	AMSR-2	Under observation		product type		
5	AW3D	-	-	Use AW3D (30m Resolution		
				ver.) as the input data.		
				Output data is resampled and		
				averaged to 250m resolution.		
				Outputted its average		
				inclination angle in the pixe		
				as well.		
6	ALOS-2	2015 ~	1 year	Use PSR MOS/FNF (25m		
	PSR MOS/FNF	Under observation		resolution ver.) as input data.		
				Output data is resampled and		
				averaged to 250m resolution		
				FNF data is calculated and		
				outputted as 250m resolution		
				in pixel as a forest rate.		
7	ALOS-2	May 2014 \sim	-	Refer to 2.4.3		
		Under observation				
8	GSMaP	Mar. 2000 \sim	1 year			
		Under observation				
9	JASMES	-	Depends			
			on			
			product			

Table. Product List

2.4.2. Product classification

For the convenience of processing, this tool categorizes the product types into the following three types. If the resolution of the product is high, please note that the tool may stop due to insufficient memory in case the latitude/longitude range is too large.

- High (high resolution product : 1m-100m)
- Middle (medium resolution product : 100m-1km)
- Global (global product : 1km-)

In addition, there is also the "Multi_M" classification, which combines two or more Middle products. There is "Multi_G" classification, as well.

2.4.3. Specific settings for ALOS-2 product

(1) Available product

The tool is available for ALOS-2 product shown in the table down below. Data format is only available for CEOS format.

LN	Processing	Observation	Note
	levels	modes	
1	L1.1	SM1/SM3	phase /possible to output
			coherence
2	L2.1	SM1/SM3/WD1	phase / impossible to output
			coherence

Table. ALOS-2 processing levels and observation modes that can be processed by the tool

(1) Obtain and locate product

Since ALOS-2 product cannot be downloaded automatically by the tool, it is necessary for users to obtain it manually. Please utilize free sample data on EORC website or the paid data that can be purchased from data providers.

Obtained product is needed to locate the folder "ALOS-2.PALSAR-2/L1.1" or "ALOS-2.PALSAR-2/L2.1" which will be created in the folder described DaraFolder of SetParameter.txt.

(2) Location of elevation data that can be used

Elevation data (AW3D) is used to perform the differential interferometric processing. DEM is needed to be located in the parameter "Params_00_DEM_Folder" (AW3D30/DSM_030.v2003 by default) in SetType.csv in advance. AW3D, the souse data downloaded by the function of this tool can be used directly.

(3) Data that can be output

By default, intensity and phase (differential phase for non-master images) are output. By setting "Read" of "SetType.csv" as "1", coherence output is possible.

(4) Parameter that can be set

Currently, following three kinds of parameter settings are available in SetType.csv.

LN	Parameter name	Default settings	explanation
1	Params_00_DEM_Folder	AW3D30/DSM_030.v2003	DEM reference
			folder
2	Params_01_WindowPix_Phase	1	Average window size
			of phase
3	Params_02_WindowPix_Coh	3	Window size of
			coherence

Table. parameter settings

2.5. Specification of output tool

(1) Category of output data and naming rules

This tool outputs following categories of files. Physical quantity data (ID 1) is saved in the folder "Tool execution folder/satellite(sensor) name/physical quantity/orbit(A/D)". Projection of output image is EQuiRectangular (EQR) projection. Fine names are registered, date (20190523 etc.), orbit (Ascending/Descending/X), resolution (0250, 0500, 1000, 04K6 (same as 4600), 09K2 (same as 9200), 11K0), range of latitude and longitude range, accordingly.

Processing log is saved in "tool execution folder/satellite(sensor) name/LOG". In case that error happens during tool execution, "_error" will be added to the file name.

ID	Contents	Extension	Example of file name
1	Physical	tif, png	20190523D_0250_N33.00_N38.00_E137.50_E142.50
	quantity data	(+ kml)	
	(Image)	csv, bin, npz	
2	Composite	tif, png	/CMP.08D/20190523D_0250_N33.00_ ··· _E142.50
	Image	(+ kml)	/CMP.16D/20190523D_0250_N33.00_ ··· _E142.50
		csv, bin, npz	/CMP.01M/20190523D_0250_N33.00E142.50
3	Tile image	png,tif	/20190523D_0250_N33.00_ ··· _E142.50/
			3-6-2.png, 3-6-3.png…
4	Coastline	png (+kml)	XXXXXXXX_0250_N26.00_N46.00_E127.00_E147.00_01_
	Image		Coastline
	Sea depth		
	Image		
5	Spatial	CSV	20190523A_20190524A_LST_Statistics_Ave
	Statistics Data		20190523A_20190524A_LST_Statistics_Max
			20190523A_20190524A_LST_Statistics_Min
			20190523A_20190524A_LST_Statistics_Std
6	Time-Series	gif	20190523A_20190524A_LST
	animation		
7	Metafile	json	20190523A_1000_N33.00_N38.00_E137.50_E142.50
8	Processing log	txt	LOG_Middle_SGLI_GCOM-C_20200106_092828

Table. Category of output data and names

(2) File capacity of output images as a guide

For a single physical quantity data image (tif, uncompressed), the data amount per pixel is 4 bytes (for single-precision floating point). For a 250m resolution image with a latitude and longitude range of 20deg, the number of pixels is 9600×9600 , and the storage capacity is $4*9600^2 = 369$ MB. In fact, the data will be about 20-30% of the actual size due to compression, but a reasonable amount of data space will be required. So please pay attention to the available space.

3. Procedure of tool usage

3.1. Obtain the accounts for satellite data usage (required)

Obtain the accounts following to the website in reference 1. [1] (G-portal, NASA HP, etc). In case of using NASA's earth data, to get the app key is also needed. The minimum number of accounts is fine to acquire.

3.2. Install of MATLAB runtime file (required)

Decompress the runtime file and install it to the PC. The runtime file is available on the website of Mathworks as follows.

https://jp.mathworks.com/products/compiler/matlab-runtime.html

Please select the version "2022a (9.12)" and OS (64bit) you will use.

3.3. Install of Decompression software (arbitrarily: windows only)

When utilizing AW3D, PSR MOS/FNF and GSMaP, decompression process would be faster by installing decompression software(7zip). In case of installing 7zip, please install executive file in the following folder

C:\Program Files\7-Zip\7z.exe

3.4. Migration of the tool and the related files (required)

Arrange the folder "for_redistribution_files_only" (including the tool main unit) on an arbitrary place in PC. Then, arrange "SetParameter.txt", "SetAccount.txt", "SetProduct.csv" and "SetType.csv" on an arbitrary place in PC. Although it is fine to arrange the folder on same location as "for_redistribution_files_only", separate location is convenient.

Please note that <u>it is necessary to arrange "SetParameter.txt"</u>, "SetAccount.txt" "SetProduct.csv" and "SetType.csv" all in the same folder.

The Output folder (each sensor) and the file are generated and saved at the same location as these four kinds of files.

3.5. Modification of SetAccount.txt (required)

Put your account information obtained by 3.1 in "ID" and "Pass" (part of XXXX). Enter ID, password and key information (if necessary) accordingly. Just enter the information for the service you would like to use.

%%% Data	provider	Account	: info	rmation	(Service(Don't	change),ID,	Pass,Key(if	any))
Account,			XXXX,	XXXX				
Account,			XXXX,	XXXX				
	GSMaP ,		XXXX,	XXXX				
Account,	JASMES ,	XXXX,	XXXX,	XXXX				

Fig. Example of setting up satellite data account information

3.6. Modification of SetParameter.txt (required)

(1) Modification of "range(date range, latitude and longitude range)" (Range Setting) (required)

Configure the date range, latitude and longitude range. As for latitude and longitude range, minimum values should be -90, -180deg and maximum values should be +90, +180deg. If the tool seems to be stopped due to memory shortage, try to minimize the latitude and longitude range.

		%%%%%%%%%%%%%%%%%		01010101010101010101010101	
DateRange,	2019/09/15, 2				(YYYY/MM/DD)
LatRange ,	33.0,	38.0,			Min, Max (-90 ຼ̃ +90 deg)
LonRange ,	137.5,	142.5,	%	Longtitude	Min, Max (-90 ~ +90 deg)

Fig. Example of range designation

(2) Modification of "tool process settings" (Process Setting) (arbitrarily)

Tool settings are modified as needed. Following table shows each functionality.

LN	Name	Value	Description	Default
1	KML	ON/OFF	In case of ON and kml file exists in parameter file, its	OFF
			range of lat/long is the target for analytical processing.	
			In case of OFF, no processing will be done.	
2	HLLR	1~5	In case a large area is specified as the analysis range	1
			for a High category product, the analysis range will be	
			processing segmental according to the numbers	
			(latitude and longitude range) listed here. Adjust	
			depend on the PC memory and your analysis purpose.	
3	MLLR	5~30	In case a large area is specified as the analysis range	30
			for a Middle category product, the analysis range will	
			be processing segmental according to the numbers	
			(latitude and longitude range) listed here. Adjust	
			depend on the PC memory and your analysis purpose.	
4	FTP	ON/OFF	In case of ON, connect to product distribution site. In	ON
			case of OFF, search for the data in local folder with no	
			connection to the site.	
5	EXE	ON/OFF	In case of ON, run processing downloaded product.	ON
			As for OFF case, no product processing is done.	
6	DEL	ON/OFF	In case of ON, delete downloaded source product. In	OFF
			case of OFF, downloaded product is saved in the local	
			folder.	
7	OVW	ON/OFF	In case of ON, the product will be processed, and the	ON
			file will be overwritten even if there is a geotifff file	
			that has been completed analytical processing, In case	
			of OFF, skip the process if the geotiff file is found in a	
			folder.	
8	DSP	ON	In case of ON, image of processing result is shown	ON
			during tool processing.	

Fig. Setting Parameter List

%%% Process Setting	
Process, KML , OF	,% ON,OFF : Area from KML (ON :Detect ROI from KML)
	,% 0.5~5:High_ Lat-Lon Area Maximum Range [deg]
	,% <u>5~30</u> : Middle Lat-Lon Area Maximum Range [deg]
	,% ON, OFF : FTP Connection (OFF:Search from Dfolder)
	,% ON,OFF : Image processing (OFF:No image processing)
	,% ON,OFF : Delete DL Data (OFF:Saved in DFolder)
	,% ON,OFF : Overwrite or Skip (OFF:TIF Found and skip)
Process, DSP , ON	,% ON,OFF : Disp Process Image(OFF:Dont show image)

Fig. Example of tool processing settings

(3) Modification of "tool output settings" (Output Setting) (arbitrarily)

Tool output settings are modified. Following table shows each functionality.

LN	Name	Value	Description	Default
1	HRES	OFF,	For the High category product, fix the	OFF
		0003,	resolution[m] of output image. In case of OFF,	
		0010,	the image has product's own resolution.	
		0030,		
		0050,		
		0100		
2	MRES	OFF	For the Middle category product, specify the	OFF
		0250,	resolution[m] of output image. In case of OFF,	
		0500,	the image has product's own resolution.	
		1000,		
		1200,		
		4600		
3	GRES	OFF	For the Global category product, specify the	OFF
		04K6,	resolution[m] of output image. In case of OFF,	
		05K6	the image has product's own resolution. (K	
		09K2,	means "10^3" Ex: 11K0 indicates 11km	
		11K0	resolution)	
4	PPD	Integer	Number of pixels per degree of latitude and	NaN
			longitude (Not specified for NaN)	
5	VPRT	0 ~ 1	Specify effective pixel rate when specified by	0.5
			HRES, MRES and GRES. Pixel rate "1" means	
			there's no defective data in the resampling pixel.	
6	ROIC	ON/OFF	In case of ON, cut the user specified lat/long	ON

Fig. Setting parameter list

			range for Global category product.	
7	GTIF	ON/OFF	In case of ON, Geotiff files are saved.	ON
8	COG	ON/OFF	In case of ON, output COG (Cloud Optimized	OFF
			Geotiff) format	
9	CMLN	1~	Maximum number of internal COG layers	
10	TDT	float, uint,	Saves the TIF data values in the selected format.	float
		int	When selecting a data type other than float, the	
			data type will be the same as the source data	
			(uint, int, etc.).	
11	NPZ	ON/OFF	Output Numpy format (.npz) data.	OFF
12	BIN	ON/OFF	In case of ON, output data as binary data.	OFF
13	CSV	ON/OFF	In case of ON, output data as csv.	OFF
14	GJSN	ON/OFF	In case of ON, output data as geojson data.	OFF
15	NDXI	ON/OFF	In case of ON, calculate normalized index using	OFF
			1st and 4th type when physical quantity types are	
			included more than four. Calculating formula is	
			as follows.	
			NDXI = (V4-V1)/(V4+V1)	
16	IC08	ON/OFF	In case of ON, output 8-day composite for the	OFF
			data as daily one. The standard day is January 1 st .	
			Note that data is proceeded even though the	
			number is less than 8 days.	
17	IC16	ON/OFF	In case of ON, output 16-day composite for the	OFF
			data as daily one. The standard day is January 1 st .	
			Note that data is proceeded even though the	
			number is less than 8 days.	
18	IC1M	ON/OFF	If case of ON, monthly composite data will be	OFF
			output for the data output as Daily data. Note	
			that even if the number of data does not include	
			all of the data for a month, it will be processed as	
			well.	
19	PNG1	ON/OFF	In case of ON, output PNG file (8 bit color) of	OFF
			each physical quantity. The KML file for display	
			will be output as well.	
20	PNG3	ON/OFF	In case of ON, save PNG file (24bit) of PRG	OFF
			image assigned R, G, B as physical quantity. The	

			KML file for display will be output as well.	
21	CMP3	ON/OFF	In case of ON, compress for 8bit color about above PNG3.	OFF
22	GAM	0 ~ 3	Proceed γ correction based on the specified value about above PNG3.	1.5
23	SPH1	ON/OFF	In case of ON, output spherical image centered by user specified lat/long for Global category product (each physical quantity).	OFF
24	SPH3	ON/OFF	In case of ON, output spherical image centered by user specified lat/long for Global category product (assigned R, G, B as 3 physical quantities).	OFF
25	GIF1	ON/OFF	In case of ON, output time-series GIF file based on each physical quantity.	OFF
26	GIF3	ON/OFF	In case of ON, output time-series GIF file using image which applies three physical quantities to R, G, B.	OFF
27	MIMG	ON/OFF	In case of ON, output projection image (PNG) from output image to Mercator projection.	OFF
28	MTIL	ON/OFF	In case of ON, project output image from equal lat/long to Mercator projection, then output segmented processing tile image (PNG).	OFF
29	ETIL	ON/OFF	In case of ON, output segmented processing file on tile image with equal lat/long.	OFF
30	CLIN	ON/OFF	In case of ON, output PNG file of coastline data in analysis range.	OFF
31	OCDM	ON/OFF	In case of ON, output mask data of sea depth (- 200m). Sea area less than 200m looks black color.	OFF
32	META	ON/OFF	In case of ON, output meta data. (.json)	OFF

%%% Output Setting %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
Output, HRES, OF ,% String : High Fix Res (0F,0003,0010,0030,0050)
Output, MRES, 0250 ,% String : Middle Fix Res (0F,0100,0250,0500,1000,1200)
Output, GRES, OF, % String : Global Fix Res (OF, 04K6, 05K6, 09K2, 11K0)
Output, VPRT, 0.50 ,% Value : Valid Pixel Rate Threshold in resizing (0~1)
Output, ROIC, ON ,% ON, OFF : Region Of Interest Cut (Global only)
Output, GTIF, ON ,% ON,OFF : Geotiff output (deflate compressed)
Output, COG , ON ,% ON,OFF : Cloud Optimized Geotiff output
Output, TDT , float,% String : TIF Data Type (float, uint or int(original))
Output, NPZ , OF ,% ON,OFF : numpy(.npz) data output
Output, BIN , OF ,% ON,OFF : Binary data output
Output, CSV, OF,% ON,OFF: CSV data output
Output, GJSN, OF,% ON,OFF : Geojson data output
Output, NDXI, OF ,% ON, OFF : Normalized Index (No.1,4 value) GTIF output
Output, ICO8, OF ,% ON, OFF : Image Composite (08day) GTIF, PNG, KML output
Output, IC16, OF ,% ON, OFF : Image Composite (16day) GTIF, PNG, KML output
Output, IC1M, OF ,% ON, OFF : Image Composite (1Month) GTIF, PNG, KML output
Output, PNG1, ON ,% ON, OFF : PNG, KML output (individual values)
Output, PNG3, ON ,% ON, OFF : PNG, KML output (upper 3 values comp RGB)
Output, CMP3, OF ,% ON, OFF : PNG RGB Image's Compression to 8 bit color
Output, GAM , 1.50 ,% Value : PNG RGB Image's Gamma
Output, SPH1, OF ,% ON, OFF : Sphere png output (Global only, individual)
Output, SPH3, OF ,% ON, OFF : Sphere png output (Global only, upper 3)
Output, GIF1, OF ,% ON, OFF : Time series GIF output (individual values)
Output, GIF3, OF ,% ON,OFF : Time series GIF output (upper 3 values comp)
Output, MIMG, OF ,% ON,OFF : Mercator IMG saving (PNG)
Output, MTIL, OF ,% ON,OFF : Mercator Web Map Tile output (PNG1,PNG3)
Output, ETIL, OF ,% ON,OFF : EQR Web Map Tile output (TNGT, NGS)
Output, CLIN, OF ,% ON,OFF : Coast line PNG,KML output
Output, CEIN, OF,% ON,OFF: Coast The Find, NME Output Output, OCDM, OF,% ON,OFF: Ocean Deepness(<-200m) Mask output
Output, META, ON ,% ON,OFF : Meta data (.json) output

Fig. Example of tool output settings

(4) Modification of "Satellite data saving folder" (required)

The satellite data, which will be the source file, will be downloaded to the folder you are setting here. <u>Please make the folder in advance or specify existing folder</u>. If you reuse the file once downloaded, tool will search the file in this folder.

Fig. Example of satellite data folder settings

3.7. Modification of SetProduct.csv (required)

As for the product you would like to run, set product initial name "Execute" as value 1. It is possible to select multiple products and set "Execute" as value 1. Product has five categories depend on its resolution, "High" (High resolution), "Multi-Middle" (Multiple data of medium resolution), "Multi-Global" (Multiple global data), "Middle" (Medium resolution) and "Global" (Global resolution).

By format conversion this csv data to excel etc. and save it the name such as "SetProduct.xlsx/SetProduct.xls", it is possible to make the data reading on a priority basis. Since data filtering is easily added for xls or xlsx, please utilize as you needed.

For some products, the observation period of the distributed data is different depend on each version. In that case, please change the value of "Version" as necessary.

Execute	Resolutior	Sensor	ID	Version	Area	Resolution_deg	Resolution_m
1	High	AW3D30	DSM_030	2003	Global	1/3600 deg	30 m
1	High	ALOS-2.PALSAR-2	SM1.UB.L1.1	NaN	Global	1/36000 deg	3m
0	High	ALOS-2.PALSAR-2	SM3.FB.L1.1	NaN	Global	1/12000 deg	10m
0	High	ALOS-2.PALSAR-2	SM1.UB.L2.1	NaN	Global	1/36000 deg	3m
0	High	ALOS-2.PALSAR-2	SM3.FB.L2.1	NaN	Global	1/12000 deg	10m
0	High	ALOS-2.PALSAR-2	WD1.WW.L2.1	NaN	Global	1/1200 deg	100m
0	High	ALOS-2.PALSAR-2	WD1.WB.L2.1	NaN	Global	1/1200 deg	100m
0	High	GSI	GEONET_F3	NaN	Japan	Points	Points
0	High	GSI	GEONET_R3	NaN	Japan	Points	Points
0	Multi_M	GCOM-C.SGLI	RGB08D	1	Global	1/480 deg	250 m
0	Multi_M	GCOM-C.SGLI	RGB01M	1	Global	1/480 deg	250 m
0	Multi_M	GCOM-C.SGLI	BNVI_08D	1	Global	1/480 deg	250 m
0	Multi_M	GCOM-C.SGLI	BNVI01M	1	Global	1/480 deg	250 m

Fig. Example of product specification (when executing AW3D30 and ALOS-2 product)

3.8. Modification of SetType.csv (arbitrarily)

When user side wants to control the product output type/QA flag settings/RGB allocation/control PNG output detailed settings, modify SetType.csv. Setting is available for the following four kinds of parameters.

In case you want to apply multiple QA flags to a physical quantity, it is necessary to set the Read of the target QA flag to all "1" and manually process the output data after running the tool.

ID	Parameter	Input	Explanation			
1	Flag	QA flag name	Specify "QA flag" and use it as mask.			
			Not applicable in case of "NaN". Only			
			one mask can be specified as a QA flag.			
2	Read	0/1	0 : not readable 1 : readable			
3	Cmin	NaN or real	If setting NaN, Automatic value			
			(average -1σ).			
			By using "log10(XX)", the color bar can			
			be logarithmically scaled.			
4	Cmax	NaN or real	If setting NaN, Automatic value			
			(average + 1 σ).			
			By using "log10(XX)", the color bar can			
			be logarithmically scaled.			
5	Cmap	See below table	Matlab-compliant color map (below			
			table)			

Table: List of setting parameters

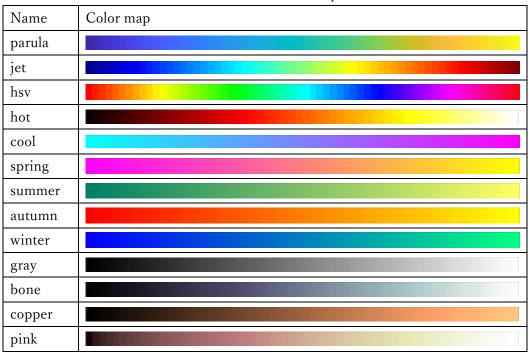


Table: List of color map

3.9. Location of TIF and KML files (arbitrarily)

It is possible to locate TIF files and kml files which users make arbitrarily in the same tree where various parameter files are located. Following figure shows both required specification of file and conducted processing in the case. Kml file can save the data made by software like Google Earth and GADM (administrative area) data.

LN	File	Specification	Processing				
	Category						
1	.tif	Projection: same	Apply to the product to be analyzed and				
		lat/long	performs mask processing to make the 0				
		stored value: 0 or 1	portion missing and only the 1 portion valid.				
			When using this function, take care that the				
			user-specified latitude and longitude ranges are				
			included in the spatial range of the mask file.				
2	.kml	Category: dot, line,	Processing spatial statistics for designated area,				
		polygon data	and output four types of csv data (Average,				
			maximum, minimum, abmodality)				

Table. Operation processing list for each located file

3.10. Execution of the tool and output file

After installing the runtime, execute the tool with command. This section explains the way of execution according to OS.

3.10.1. Execution of the tool and output file

(1) Windows 64bit

Firstly, run the command prompt. Move the current directory to the directory where the tool executable is located using the cd command, and enter "IMG_Stack[Space][Absolute path of the folder where parameter file is located] " as a command. Parameter file contains four files - "SetParameter.txt", "SetAccount.txt", "SetProduct.csv" and "SetType.csv". For example, in case of the following condition:

Storage location of tool : C:¥IMG_Stack_folder

• Storage location of Parameter file : C:¥Output

Enter the following commands.

cd C:¥IMG_Stack_folder IMG_Stack C:¥Output

Above script can be a batch file. So, execution of the tool is available just by double clicking the batch file. Also, it makes it easier to reprocess after parameter adjustment based on regular processing and output result.

Sometimes, it takes a few minutes before processing since MATLAB is boot and set up in the background. The screen appearing during the process is the confirmation screen of projection graphics and processing status.

```
IMG Stacking Tool
Version : 2021-01-12_14:53:20_JST
Until ; 2021-03-31_12:00:00_JST
Developer : Earth Observation Research Center, JAXA
Contact : N/A
%% Tools Available Period check by Time
- Validated!
%% Set Files reading
- SetParameter.txt loaded correctly
- SetProduct.csv loaded correctly
Multi_M , GCOM-C.SGLI , RGB__01M , 1
- SetType.csv loaded correctly
- SetAccount.txt loaded correctly
G-portal ... ID : Inputed , PASS : Inputed
MODIS ... ID : Inputed , PASS : Inputed
GSMaP ... ID : Inputed , PASS : Inputed
AHI ... ID : Inputed , PASS : Inputed
GEONET ... ID : Inputed , PASS : Inputed
JASMES ... ID : Inputed , PASS : Inputed
- No Vector (kml for Statistics) File detected
- No Raster (tif for Mask) File detected
                                                                                                                  , KEY : No Input
, KEY : Inputed
, KEY : No Input
%% KML files will not be used to detect ROI
%% Multi Product Processing initiated
%% Multi-Processing Product (Satellite, Product Name)
- GCOM-C.SGLI, RV08_01M
- GCOM-C.SGLI, RV05_01M
- GCOM-C.SGLI, RV03_01M
%% Computer Memory Status
- Maximum Memory : 127.69 [GB]
- Using Memory : 001.09 [GB]
%% Date and Location is set
- Date : 2018/04/01 - 2020/06/01
- Lat : +020.00 to +060.00
- Lon : +120.00 to +160.00
%% GCOM-C.SGLI Middle resolution stacking started
%% GCOM-C.SGLI RV08.Statistics product downloading/detecting started
 <u>%% FTP Connection Processing</u>
      Success!
 %% Product Name Detection from FTP server
      Date : 001/027 :
%% Failed to get Product list
- Identifier : MATLAB:Java:GenericException
- Waiting ...0 seconds
- Re-Connecting process started
 %% FTP Connection Processing
   - Success!
%% 3309 Files : 0052 Product found!
- Date : 002/027 :
%% Failed to get Product list
- Identifier : MATLAB:Java:GenericException
- Waiting ...0 seconds
```

Fig. Example of Command Prompt screen after tool execution (windows)

3.10.2. Example of output file

When the tool has installed successfully, user designated file will be generated. The file will be displayable on google earth and GIS soft etc. by using KML file.

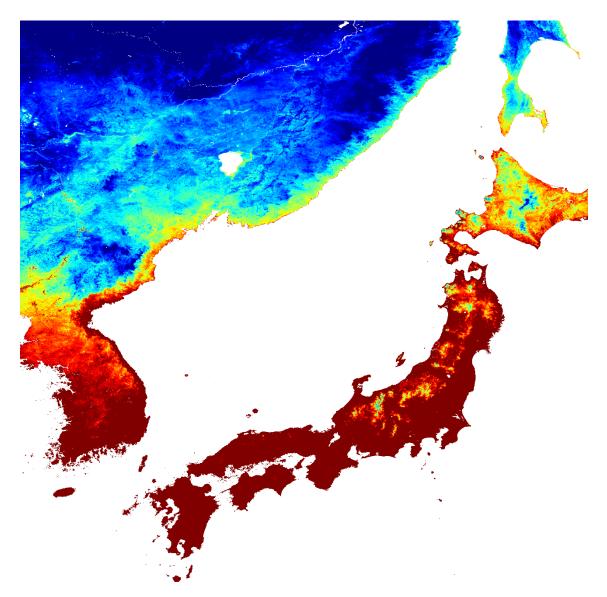


Fig. Example of output file (GCOM-C LST one-month average; December 2018)

3.10.3. About log file

Analyzed log is automatically recorded in "LOG" folder inside the satellite folder from the folder which SetParameter.txt is located. This happens even in the error case. Please note that the data may not be recorded properly when the tool is stopped due to insufficient memory.

4. Caution and supplementary note for tool usage

4.1. Adjustment of set up file

(1) Specified range of date when using statistical data (SetParameter.txt)

When utilizing statistical product (one-month, 8 days average, etc.), pay attention to specify the date. For example, one-month statistical product of GCOM-C is all saved in "1st day" of the month.

4.2. Tool usage

(1) Firewall warning

Following warning is shown at start-up on Windows. However, there is no problem because it is for processing request by parallel computation.

🔗 Windows セキュリティの重要な警告	Х				
そのアプリの機能のいくつかが Windows Defender ファイアウォールでブロックされています					
すべてのパブリック ネットワークとプライベート ネットワークで、Windows Defender ファイアウォールにより img_stack の 機能のいくつかがブロックされています。 名前(N): img_stack 発行元(P): 不明 パス(H):					
img_stack にこれらのネットワーク上での通信を許可する: ☑ プライベート ネットワーク (ホーム ネットワークや社内ネットワークなど)(R) □ パブリック ネットワーク (空港、喫茶店など) (非推奨)(U)					
(このようなネットワークは多くの場合、セキュリティが低いかセキュリティが設定されていません) アプリにファイアウォールの経由を許可することの危険性の詳細 ・ アクセスを許可する(A) キャンセル					

Fig-4. Firewall Warning Screen

(2) Error caused by creating intermediate file when product download is interrupted

There is a case that intermediate file is created when product download is interrupted due to some sort of reason. In this case, remove the intermediate file. Otherwise, product cannot be read right way.

(3) Data output of only missing value

Although data is created per day, there is a case of outputting only missing value data due to cloud loss, range of satellite observation and so on. So, this is not a trouble of the tool. In this case, file output in PNG format will not be executed.

(4) Download failure due to the problem of product distribution site

Due to a problem with the product distribution site, you cannot obtain the target satellite images in some cases. In this case, please wait for a while and try again to conduct the process or contact the support of each product distribution site.

(5) Product cannot be found/processed in tool processing

There are cases that the observation period of the data provided is different depending on the version of the product. For example, version 1 product of SHIKISAI has no data after July 2020. Instead, version 2 has been available since July 2020. Please change "Version" of SetProduct.csv and try again.

5. About tool specification and quality

- This tool can be used without any charge, but limited for a non-commercial purpose such as education, research and so on.
- If you plan to publish the outcome of using this tool in a paper etc., please include a description to that effect in the main text. (example: "We use JAXA ASIST in preprocessing of the data shown in this paper") If possible, it would be appreciated if you could contact us about it in advance.

• Please confirm the product format or distribution policy of each product on its own distribution site as necessary.

- The specification/service of this tool subjects to change without notice. Also, this tool is in prototype stage for satellite image utilization, so JAXA cannot ensure the quality and accuracy regarding the performance.
- We cannot guarantee any problem caused by or possibly caused by using the tool. Redistribution is prohibited.

6. Contact

If you have any questions about this tool, or if you would like to present your results, please send an email to the following address.

Z-ASIST@ml.jaxa.jp (Automated Satellite Image Stacking Tool Secretariat)

If an unexplained error occurs and the problem cannot be solved by checking the analysis log or the contents of Chapter 4, please contact us with "SetParameter.txt", "SetType.csv", and "SetProduct.csv". We will use your notice as a reference for future upgrade.

Please note that it may take some time for us to respond to your inquiries.

7. References

7.1. Terra, Aqua MODIS

- [1] MODIS User registration (NASA website) : land data https://urs.earthdata.nasa.gov/users/new
- [2] MODIS Data Pool (NASA website) : Land data https://lpdaac.usgs.gov/tools/data-pool/

7.2. GCOM-C SGLI

- [1] G-portal User registration https://gportal.jaxa.jp/gpr/user/regist1?lang=en
- [2] G-portal FTP website ftp.gportal.jaxa.jp
- [3] GCOM-C FAQ (G-portal) https://gportal.jaxa.jp/gpr/information/support#common
- [4] GCOM-C FAQ 025 GCOM-C Guidance for Product utilization Introduction (G-portal) https://suzaku.eorc.jaxa.jp/GCOM_C/users_portal/faq/faq0025_j.html
- [3] Standard Products and Algorithms (GCOM-C HP) htmlhttps://suzaku.eorc.jaxa.jp/GCOM_C/data/Product_std.html
- [4] SGC-180025 GCOM-C "SHIKISAI" Data Users Handbook https://gportal.jaxa.jp/gpr/assets/mng_upload/GCOM-C/GCOM-C_SHIKISAI_Data_Users_Handbook_jp.pdf
- [5] SGC-180021 SGLI Level 1 Product Format Description https://gportal.jaxa.jp/gpr/assets/mng_upload/GCOM-C/SGLI_Level1_Product_Format_Description_jp.pdf
- [6] SGC-180023 SGLI Higher Level Product Format Description <u>https://gportal.jaxa.jp/gpr/assets/mng_upload/GCOMC/SGLI_Higher_Level_Product_Format_Description_en.pdf</u>

7.3. GCOM-W AMSR-2

- [1] Standard Product (GCOM-W HP) https://suzaku.eorc.jaxa.jp/GCOM_W/data/data_w_product-2.html
- [2] Format specification, Users handbook, and Toolkit (GCOM-W HP) https://suzaku.eorc.jaxa.jp/GCOM_W/data/data_w_use.html

7.4. AW3D, ALOS-2 PSR MOS/FNF

- [1] Precise Global Digital 3D Map "ALOS World 3D" Homepage https://www.eorc.jaxa.jp/ALOS/en/aw3d/index_e.htm
- [2] ALOS World 3D-30m (AW3D30) Version 2.2 Product Instruction https://www.eorc.jaxa.jp/ALOS/aw3d30/aw3d30v22_product_j.pdf

- [3] Global PALSAR-2/PALSAR/JERS-1 Mosaic and Forest/Non-Forest map https://www.eorc.jaxa.jp/ALOS/en/palsar_fnf/fnf_index.htm
- [4] Global 25m resolution PALSAR-2/PALSAR Mosaic and Forest/Non-Forest map instruction https://www.eorc.jaxa.jp/ALOS/palsar_fnf/DatasetDescription_PALSAR2_Mosaic_FNF_ja_revH.pdf

7.5. ALOS-2

- [1] ALOS-2/ALOS User Interface Gateway (AUIG2) https://auig2.jaxa.jp/ips/home
- [2] ALOS-2 Product format instruction https://www.eorc.jaxa.jp/ALOS-2/doc/jformat.htm
- [3] ALOS-2 Sample product https://www.eorc.jaxa.jp/ALOS-2/doc/sam_jindex.htm

7.6. GSMaP

- [1] GSMaP User registration https://sharaku.eorc.jaxa.jp/GSMaP/registration_j.html
- [2] GSMaP User guide https://sharaku.eorc.jaxa.jp/GSMaP/guide_j.html

7.7. JASMES

[1] JASMES Portal Top

https://kuroshio.eorc.jaxa.jp/JASMES/index.html

7.8. Others

- [1] Global Administrative Areas (Database of country administrative areas) https://gadm.org/
- [2] GSHHG (A Global Self-consistent, Hierarchical, High-resolution Geography Database) http://www.soest.hawaii.edu/pwessel/gshhg/
- [3] Natural Earth bathymetry (Sea depth 200m) Data https://www.naturalearthdata.com/downloads/10m-physical-vectors/